



U-Nuts



Single thread engaging impressions, for blind mounting at the edge and center of panels. Available in "conical" impression and "lanced tooth" Impression.

U-Nuts Generation II											
Part Number	Size	Panel Thickness		Dimension						Industry P/N	Style
		(Min)	(Max)	T	W (nom)	L (nom)	X (nom)	H	C		
C231	8AB	.025	.150	.028	.530	.770	.350	.275	-	D98231	C
C303	14AB/B	.064	.125	.037	.500	.980	.540	.343	.500	D1303	L
C316	8AB/B	.020	.071	.028	.540	.768	.375	.328	.312	D98316	L&C
C317	8AB/B	.071	.150	.028	.540	.768	.375	.328	.312	D98317	L&C
C343	¼-20	.062	.125	.025	.500	.980	.550	.281	.500	D7343	L
C434	8AB/B	.071	.150	.028	.437	.992	.600	.328	.551	D98434	L&C
C437	10-16	.109	.125	.031	.550	.630	.310	.281	.281	D6437	L
C585	8AB/B	.094	.114	.028	.535	.728	.355	.256	.315	D98585	L&C
C640	8-16AB	.025	.150	.028	.535	.770	.350	.275	.270	D19640-8	C
C641	10-16AB	.025	.150	.031	.530	.770	.350	.275	.270	D19640-10	C

Universal Metal Part Numbers

Base P/N Finish
 XXXX - XXX

Finish	Description	Advantages	SS Corrosion Rating
103	Phosphate, 2 coats Olive Drab Paint	Cost effective, Moderate SS	96 Hours
131	Phosphate, 2 coats Black Paint	Cost effective, Moderate SS	96 Hours
132	Phosphate, 2 coats Metallic Paint	Cost effective, Moderate SS	96 Hours
133	Phosphate, 2 coats Green Paint	Cost effective, Moderate SS	96 Hours
134	Phosphate, 2 coats Red Paint	Cost effective, Moderate SS	96 Hours
328	2 Coats Geomet	High SS resistance, hex-free	480 Hours
324	2 Coats Geomet & Black	High SS resistance, hex-free	480 Hours

REV5.1-08



U-Nuts



Single thread engaging impressions, for blind mounting at the edge and center of panels. Available in "conical" impression and "lanced tooth" Impression.

U-Nuts												
Generation I												
Part Number	Size	Panel Thickness		T	Dimension				H	C	Style	Variation
		(Min)	(Max)		W (nom)	L (nom)	X (nom)					
C3340	4Z	.025	.032	.020	.32	.38	.18	-	.156	L	1-6	
C3322	6-32	.010	.040	.017	.50	.52	.27	.187	.220	L	6	
C6069	6-32	.040	.051	.017	.32	.36	.18	.218	.156	L		
C6072	6B	.060	-	.020	.44	.47	.25	.260	.180	C		
C3420	8A	.050	.063	.017	.32	.55	.32	.218	.280	L	1	
C3424	8A	.045	.060	.020	.44	.47	.25	-	.220	C		
C6142	8A	.029	-	.028	.44	.65	.44	-	.400	C		
C2857	8A	.037	.062	.025	.44	.64	.31	.218	.260	C		
C3616	8A	.050	.075	.028	.44	.62	.32	.250	.300	L		
C3790	8A	.070	.095	.017	.38	.50	.28	-	.220	C		
C3526	8B	.102	.125	.028	.62	.70	.45	-	.400	L		
C3888	8B	.025	.051	.028	.44	.64	.32	-	.260	L		
C4794	8B	.025	.064	.028	.44	.84	.52	.281	.500	L	3	
C4587	8B	.025	.060	.028	.44	.84	.52	.281	.500	C		
C3843	8B	.025	.030	.025	.38	.47	.23	.218	.180	L	2	
C6089	8B	.025	.040	.020	.44	.47	.25	.190	.220	-	3	
C3819	8B	.025	.040	.028	.50	.62	.37	.281	.340	L	2	
C2855	8B	.025	.081	.025	.44	.58	.30	.218	.240	C		
C6006	8B	.035	.051	.028	.50	.52	.27	.250	.250	L	6	
C2496	8B	.035	.065	.028	.44	.64	.33	-	.280	L		
C3802	8B	.064	.093	.028	.62	.70	.45	.281	.430	L		
C4854	8B	.090	-	.017	.38	.64	.34	.218	.310	C		
C4888	8B	.120	-	.017	.38	.64	.34	.250	.310	C		
C4991	8B	.275	-	.017	.38	.57	.27	.200	.250	C		
C3356	10-32	.025	.062	.017	.44	.66	.34	.312	.310	L	4	
C3725	10-32	.025	.064	.017	.44	.86	.52	-	.500	L	3	
C4739	10-24	.025	.081	.020	.44	.64	.32	.312	.310	L	4	




U-Nuts



Single thread engaging impressions, for blind mounting at the edge and center of panels. Available in "conical" impression and "lanced tooth" Impression.

U-Nuts Generation I												
Part Number	Size	Panel Thickness		T	Dimension						Form	Variation Style
		(Min)	(Max)		W (nom)	L (nom)	X (nom)	H	C			
C3726	10/24	.025	.094	.020	.44	.64	.33	.218	.310	L	3	
C6074	10/24	.035	-	.020	.50	.58	.29	.281	.250	L	5	
C4650	10/24	.035	-	.020	.50	.50	.26	-	-	L	6	
C4749	10A	.023	.050	.031	.50	.47	.25	.281	.250	L		
C4957	10A	.030	.051	.031	.44	.66	.44	-	.400	C	3	
C3247	10A	.037	.064	.031	.44	.64	.32	.281	.290	L	3	
C6050	10A	.065	.087	.031	.44	.64	.31	.250	.250	L		
C2005	10B	.023	.050	.031	.50	.47	-	.281	.250	C		
C4607	10B	.035	.070	.020	.44	.46	.25	-	-	C		
C3826	10B	.032	.064	.031	.44	.64	.32	.281	.280	L		
C3770	10B	.109	.125	.031	.44	.62	.32	.281	.280	L	1	
C4933	10B	.140	.160	.028	.62	.58	.34	-	.330	C	3	
C6239	14B	-	-	.030	.50	.81	-	-	.32	C		

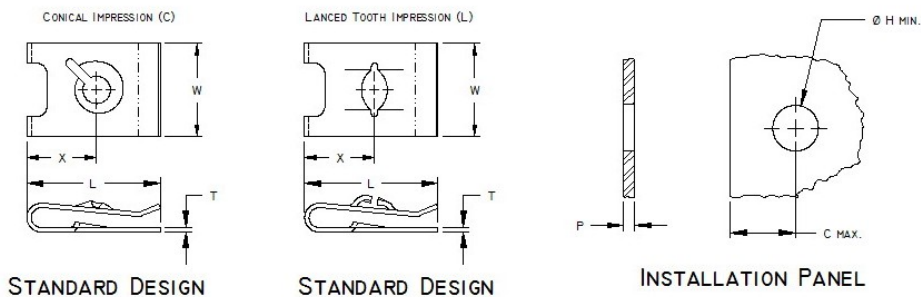

DESIGN VARIATION STYLES

